



LED Lighting Solutions

Standard Series

LED

The Future of Energy

- Up to 90% less energy
- Up to 52lm/W
- Long Life (25,000 hours)
- Warm/White Light
- Instant Start
- 100% retrofit
- High Light Output
- Highest Safety Standard

We are proud to present the next generation of low-energy lighting with a wide range of retrofit LED lamps that live up to the promise of attractive, safe and, above all, efficient lighting solutions.

LED Lights give you a lot of light for your energy, up to 52 lumen per watt, to be precise, which makes them around 10 times more efficient than their incandescent or halogen counterparts .

Produce instant warm, soothing light the moment you switch them on. Their unique construction ensures perfect insulation of the metal casing, making them extremely safe to use, even in humid conditions. The retrofit LED lamps come in a variety of decorative shapes and caps, offering 100 % compatibility and one-to-one replacement with existing installations.

Try switching a LED lamp on and off 60,000 times over a period of 15 years and you will discover they are made to last a lifetime. Offering more than 15,000 hours of warm, white light, they will pay for themselves many, many times over.



LED BULB Light (Standard Type)

Features:

- High performance SMD led: low light degradation, up to 75% lumen maintenance after 35,000hrs operating.
- High level safety protection: pass the 4000V HI-POT test for Europe market.
- Unique thermal management: Aluminum back casing dissipate the inside heat efficiently.



High power led General global light



L60QH-1W5-W		Size: 60*115 Angle: 120 degrees Current: 300mA 420-480 lumens brightness CCT: 6000 - 6500K Base: E27 Voltage: AC85 - 265V: Power: 5W Lifespan: 25,000 – 30,000 hours Warranty: 1 year
L60QH-1W5-M		Size: 60*115 Angle: 120 degrees Current: 300mA 360-420 lumens brightness CCT: 2700 - 3300K Base: E27 Voltage: AC85 - 265V: Power: 5W Lifespan: 25,000 – 30,000 hours Warranty: 1 year

High power led General global light



L60G-1W3-W		Size: 43*115 Angle: 120 degrees Current: 300mA 170 lumens brightness CCT: 6000 - 6500K Base: E27 Voltage: AC85 - 265V: Power: 5W Lifespan: 25,000 – 30,000 hours Warranty: 2 year
L60G-1W3-M		Size: 43*115 Angle: 120 degrees Current: 300mA 140 lumens brightness CCT: 2700 - 3300K Base: E27 Voltage: AC85 - 265V: Power: 5W Lifespan: 25,000 – 30,000 hours Warranty: 2 year

LED BULB Light (Standard Type)

Features:

- High performance SMD led: low light degradation, up to 75% lumen maintenance after 35,000hrs operating.
- High level safety protection: pass the 4000V HI-POT test for Europe market.
- Unique thermal management: Aluminum back casing dissipate the inside heat efficiently.

High power led General global light



L60QM-1W5-W	<input type="checkbox"/>	5*1W SMD, 5W led global light, E27 base, White, CCT: 5500-6000K Description: 60*114MM
L60QM-1W5-M	<input type="checkbox"/>	5*1W SMD, 5W led global light, E27 base, WarmWhite, CCT: 2800-3300K Description: 60*114MM
L70QS-1W5-W	<input type="checkbox"/>	5*1W High power led global light, E27 base, White, CCT: 5500-6000K. Description: 70*103MM
L70QS-1W5-M	<input type="checkbox"/>	5*1W High power led global light, E27 base, WarmWhite, CCT: 2800-3300K Description: 70*103MM
L60QS-1W6-W	<input type="checkbox"/>	6*1W High power led global light ,E27 base, White, CCT: 5500-6000K Description: 60*107MM
L60QS-1W6-M	<input type="checkbox"/>	6*1W High power led global light, E27 base, WarmWhite, CCT: 2800-3300K Description: 60*107MM



L70-QS-1W7-W	<input type="checkbox"/>	7*1W High power led global light, E27 base, White, CCT: 5500-6000K Description: 70*150MM
L70-QS-1W7-M	<input type="checkbox"/>	7*1W High power led global light, E27 base, WarmWhite , CCT:2800-3300K Description: 70*150MM

LT8 LED Tube Light (Standard Type)

Features:

- High performance SMD led:low light degradation,up to 75% lumen maintenance after 35,000hrs operating.
- High level safety protection:pass the 4000V HI-POT test for Europe market.
- Unique thermal management:Aluminum back casing dissipate the inside heat efficiently.

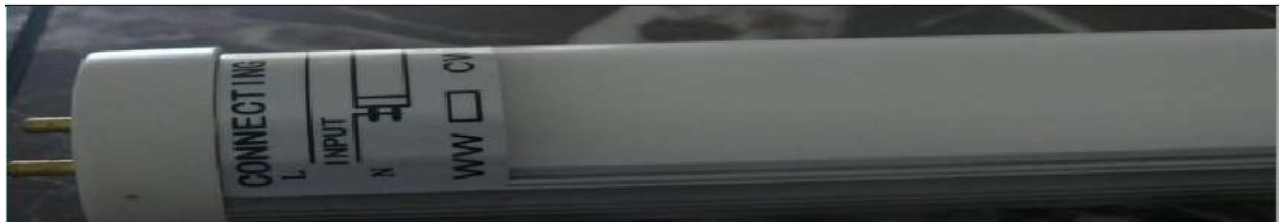


Part No.	Description	
L60cm*W2.54cm,10 Watt, 144PCS SMD LED, AC200-265 /AC100-120V		
LT8-60CM-144W-SMD		144 pcs 3528 SMD LEDs WHITE (CCT 6000K-7000K),790LM
LT8-60CM-144MW-SMD		144 pcs 3528 SMD LEDs COMMERCIAL WHITE (CCT 4000K-4500K),790LM
LT8-60CM-144M-SMD		144 pcs 3528 SMD LEDs WARM WHITE (CCT2800K-3300K), 790LM
L60cm*W2.54cm,8.5Watt, 120PCS SMD LED, AC200-265 /AC100-120V		
LT8-60CM-120W-SMD		120 pcs 3528 SMD LEDs WHITE (CCT 6000K-7000K), 670LM
LT8-60CM-120MW-SMD		120 pcs 3528 SMD LEDs COMMERCIAL WHITE (CCT 4000K-4500K), 670LM
LT8-60CM-120M-SMD		120 pcs 3528 SMD LEDs WARM WHITE (CCT2800K-3300K), 670LM
L60cm*W2.54cm,9 Watt,30pcs SMD LED, AC200-265 /AC100-120V		
LT8-60CM-30W-SMD		30 pcs 3528 0.3W unit high power SMD LEDs WHITE (CCT 6000K-7000K), 610LM
LT8-60CM-30M-SMD		30 pcs 3528 0.3W unit high power SMD LEDs WARM WHITE (CCT2800K-3300K),660LM

LT8 LED Tube Light (Standard Type)

Features:

- High performance SMD led:low light degradation,up to 75% lumen maintenance after 35,000hrs operating.
- High level safety protection:pass the 4000V HI-POT test for Europe market.
- Unique thermal management:Aluminum back casing dissipate the inside heat efficiently.



Part No.	Description	
L120cm*W2.54cm, 23 Watt, 320PCS SMD LED, AC200-265 /AC100-120V		
LT8-120CM-320W-SMD	<input type="checkbox"/>	320 pcs 3528 SMD LEDs WHITE (CCT 6000K-7000K),1483LM
LT8-120CM-320MW-SMD	<input type="checkbox"/>	320 pcs 3528 SMD LEDs COMMERCIAL WHITE (CCT 4000K-4500K),1483LM
LT8-120CM-320M-SMD	<input type="checkbox"/>	320 pcs 3528 SMD LEDs WARM WHITE (CCT2800K-3300K), 1483LM
L120cm*W2.54cm, 20 Watt, 288PCS SMD LED, AC200-265 /AC100-120V		
LT8-120CM-288W-SMD	<input type="checkbox"/>	120 pcs 3528 SMD LEDs WHITE (CCT 6000K-7000K), 1580LM
LT8-120CM-288MW-SMD	<input type="checkbox"/>	120 pcs 3528 SMD LEDs COMMERCIAL WHITE (CCT 4000K-4500K), 1580LM
LT8-120CM-288M-SMD	<input type="checkbox"/>	120 pcs 3528 SMD LEDs WARM WHITE (CCT2800K-3300K), 1580LM
L120cm*W2.54cm, 15 Watt, 240PCS SMD LED, AC200-265 /AC100-120V		
LT8-120CM-240W-SMD	<input type="checkbox"/>	240 pcs 3528 SMD LEDs WHITE (CCT 6000K-7000K), 1330LM
LT8-120CM-240MW-SMD	<input type="checkbox"/>	240 pcs 3528 SMD LEDs COMMERCIAL WHITE (CCT 4000K-4500K), 1330LM
LT8-120CM-240M-SMD	<input type="checkbox"/>	240 pcs 3528 SMD LEDs WARM WHITE (CCT2800K-3300K), 1330LM
L120cm*W2.54cm, 19 Watt, 60PCS SMD LED, AC200-265 /AC100-120V		
LT8-120CM-60W-SMD	<input type="checkbox"/>	60 pcs 3528 0,3W unit high power SMD LEDs WHITE (CCT 6000K-7000K), 1224LM
LT8-120CM-60MW-SMD	<input type="checkbox"/>	60 pcs 3528 0,3W unit high power SMD LEDs WARM WHITE (CCT 2800K-3300K), 1324LM

LT8 LED Tube Light (Standard Type)

Features:

- High performance SMD led:low light degradation,up to 75% lumen maintenance after 35,000hrs operating.
- High level safety protection:pass the 4000V HI-POT test for Europe market.
- Unique thermal management:Aluminum back casing dissipate the inside heat efficiently.



Part No.	Description	
L150cm*W2.54cm, 23 Watt, 360PCS SMD LED, AC200-265 /AC100-120V		
L150CM-360W-SMD	<input type="checkbox"/>	360 pcs 3528 SMD LEDs WHITE (CCT 6000K-7000K),1961LM
L150CM-360MW-SMD	<input type="checkbox"/>	360 pcs 3528 SMD LEDs COMMERCIAL WHITE (CCT 4000K-4500K),1961LM
L150CM-360M-SMD	<input type="checkbox"/>	360 pcs 3528 SMD LEDs WARM WHITE (CCT2800K-3300K), 1961LM
L150cm*W2.54cm, 27 Watt, 90PCS SMD LED, AC200-265 /AC100-120V		
LT8-150CM-90W-SMD	<input type="checkbox"/>	90 pcs 3528 0,3W unit high power SMD LEDs WHITE (CCT 6000K-7000K), 1870LM
LT8-150CM-90MW-SMD	<input type="checkbox"/>	90 pcs 3528 0,3W unit high power SMD LEDs WARM WHITE(CCT 2800K-3300K), 1970LM
L150cm*W2.54cm, 40 Watt, 120PCS SMD LED, AC200-265 /AC100-120V		
LT8-150CM-60W-SMD	<input type="checkbox"/>	120 pcs 3528 0,3W unit high power SMD LEDs WHITE (CCT 6000K-7000K), 2450LM
LT8-150CM-60MW-SMD	<input type="checkbox"/>	120 pcs 3528 0,3W unit high power SMD LEDs WARM WHITE(CCT 2800K-3300K), 2550LM

LED Light (Standard Type)

Features:

- High performance SMD led: low light degradation, up to 75% lumen maintenance after 35,000hrs operating.
- High level safety protection: pass the 4000V HI-POT test for Europe market.
- Unique thermal management: Aluminum back casing dissipate the inside heat efficiently.



LMR16-1W3-W	<input type="checkbox"/>	3*1W High power led bulb light, LMR16 BASE, WARM White, CCT: 5500-6000K. Description: 50*59MM
LMR16-1W3-M	<input checked="" type="checkbox"/>	3*1W High power led bulb light, LMR16 BASE, WARM White, CCT: 2800-3300K. Description: 50*59MM
LE27-1W3-W	<input type="checkbox"/>	3*1W High power led bulb light, LE27 BASE, WARM White, CCT: 5500-6000K. Description: 50*59MM
LE27-1W3-M	<input checked="" type="checkbox"/>	3*1W High power led bulb light, LE27, WARM White, CCT: 2800-3300K. Description: 50*55MM
LGU10-1W3-W	<input type="checkbox"/>	3*1W High power led bulb light, LGU10 BASE, WARM White, CCT: 5500-6000K. Description: 50*59MM
LGU10-1W3-M	<input checked="" type="checkbox"/>	3*1W High power led bulb light, LGU10 BASE, WARM White, CCT: 2800-3300K. Description: 50*59MM

HIGH POWER LED BULB LIGHT



LMR16-1W3-W-HD	<input type="checkbox"/>	7*1W High power led bulb light, LMR16 base, White, CCT: 5500-6000K Description: 50*54MM
LMR16-1W3-W-HD	<input checked="" type="checkbox"/>	3*1W High power led bulb light, LMR16 base, WarmWhite, CCT: 2800-3300K Description: 50*54MM
LE27-1W3-W-HD	<input type="checkbox"/>	3*1W High power led bulb light, LE27 base, WarmWhite, CCT: 5500-600K Description: 50*55MM
LE27-1W3-W-HD	<input checked="" type="checkbox"/>	3*1W High power led bulb light, LE27 base, WARM White, CCT: 2800-3300K Description: 50*55MM
LGU10-1W3-W-HD	<input type="checkbox"/>	3*1W High power led bulb light, LGU10 base, White, CCT: 5500-6000K Description: 50*55 MM
LGU10-1W3-M-HD	<input checked="" type="checkbox"/>	3*1W High power led bulb light, LGU10 BASE, WARM White, CCT: 2800-3300K. Description: 50*55MM

LED Light (Standard Type)









Features:

- High performance SMD led: low light degradation, up to 75% lumen maintenance after 35,000hrs operating.
- High level safety protection: pass the 4000V HI-POT test for Europe market.
- Unique thermal management: Aluminum back casing dissipate the inside heat efficiently.



HIGH POWER LED BULB LIGHT















LPAR30-1W5-W		5*1W High power led bulb light, LPAR30 base, White, CCT: 5500-6000K Description: 92*77MM
LPAR30-1W5-M		5*1W High power led bulb light, LPAR30 base, WarmWhite, CCT: 2800-3300K Description: 92*77MM
LPAR30-1W7-W		7*1W High power led bulb light, LPAR30 base, White, CCT: 5500-6000K Description: 92*77MM
LPAR30-1W7-M		7*1W High power led bulb light, LPAR30 base, WarmWhite, CCT: 2800-3300K Description: 92*77MM
LPAR38-1W9-M		9*1W High power led bulb light, LPAR38 base, WarmWhite, CCT: 2800-3300K Description: 125*145MM
LPAR38-1W9-W		9*1W High power led bulb light, LPAR38 base, White, CCT: 5500-6000K Description: 125*145MM
LPAR38-1W12-M		12*1W High power led bulb light, LPAR38 base, WarmWhite, CCT: 2800-3300K Description: 125*145MM
LPAR38-1W12-W		12*1W High power led bulb light, LPAR38 base, White, CCT: 5500-6000K. Description: 125*145MM

LGU10 BASE DIP LED LIGHT



Features:

- High performance SMD led:low light degradation,up to 75% lumen maintenance after 35,000hrs operating.
- High level safety protection:pass the 4000V HI-POT test for Europe market.
- Unique thermal management:Aluminum back casing dissipate the inside heat efficiently.

Part No.	Description	
50mm*53mm LGU10 base DIP, AC200-265		
LGU10-S48-DIP-W		48 DIP LEDs WHITE,2.8W,180LM
LGU10-S48-DIP-M		48 DIP LEDs WARM WHITE,2.8W,180LM
LGU10-S48-DIP-G		48 DIP LEDs ,Green,2.8W,180LM
LGU10-S48-DIP-B		48 DIP LEDs ,Blue,2.8W,180LM
LGU10-S48-DIP-Y		48 DIP LEDs ,yellow,2.8W,180LM
LGU10-S48-DIP-R		48 DIP LEDs ,Red,2.8W,180LM
50mm*50mm LGU10 base DIP, AC200-265		
LGU10-S21-DIP-W		21 DIP LEDs WHITE,1.3W, 95LM
LGU10-S21-DIP-M		21 DIP LEDs WARM WHITE,1.3W, 95LM
LGU10-S21-DIP-G		21 DIP LEDs Green,1.3W, 95LM
LGU10-S21-DIP-B		21 DIP LEDs Blue,1.3W, 95LM
LGU10-S21-DIP-Y		21 DIP LEDs Yellow,1.3W, 95LM
LGU10-S21-DIP-R		21 DIP LEDs Red,1.3W, 95LM